

## DECLARATION OF PERFORMANCE

The undersigned, representing  
Siparila Oy (Varaslahdentie 1, 40800 Vaajakoski, Finland)  
hereby declares that the

### THERMALLY MODIFIED SOLID WOOD PINE CLADDING AND PANELING WITHOUT SURFACE COATING

is in conformity with the provisions of the EC Regulation No 305/2011 Construction Product  
Regulation system of assessment and verification of constancy of performance:

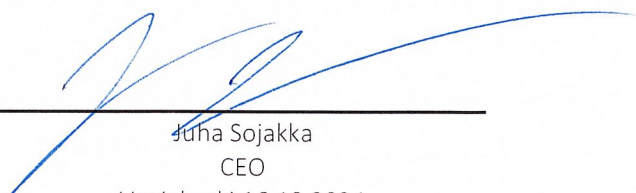
System 3

and is in accordance with the requirements of

EN 14915:2013

Notified body Meža un koksnes produktu pētniecības un attīstības institūts (No. 2040) performed the  
initial type testing under system 3 and issued the test reports.

CHARACTERISTIC	PERFORMANCE DECLARATION
Species	Scots pine (Pinus sylvestris)
Intended use	For exterior use
Width range	35–225 mm
Density and range of total/minimum thickness	435 kg/m <sup>3</sup> , >17/9 mm
Installation direction	Horizontal and vertical
Reaction to fire	D-s2, d0
Emission of formaldehyde	E1
Content of pentachlorophenol	NPD
Release of other dangerous substances	NPD
Water vapor permeability	NPD
Thermal resistance	0,12 W/(m K)
Sound absorption	NPD
Biological durability (according to CEN/TS 15083-1:2005)	Class 2, when thermally modified (215 °C, Intense)

  
Juha Sojakka  
CEO  
Vaajakoski 16.10.2024